



Zhejiang Chifeng Electric Co., Ltd.

No. 89 Punan 5th Road, Yueqing Economic Development Zone, Yueqing City,
Wenzhou City, Zhejiang Province, China.

www.wzcfdq.com

CF-HR18 FUSE SWITCH DISCONNECTOR SPECIFICATION

1. Product Description

The Chifeng fuse-switch disconnecter series is designed for NH fuses according to IEC/EN 60269-2. For fuse sizes 000/00C, the corresponding fuse-switch disconnecter have rated currents of 100A, rated voltage of 690Vac.

The Chifeng fuse switch disconnecter series the user quick and easy installation as well as a high degree of safety during installation and maintenance.

2. Applications

- House incoming units
- General protection in smaller distribution panels
- Measuring transformer cabinets
- Transmitting stations for telecommunications

3. Features and Benefits

- Compact design for NH 000/00C
- Modern integrated cable clamps
- Integrated cable shrouds IP 20




Zhejiang Chifeng Electric Co., Ltd.

No. 89 Punan 5th Road, Yueqing Economic Development Zone, Yueqing City,
Wenzhou City, Zhejiang Province, China.

www.wzcfdq.com

4. Technical Data

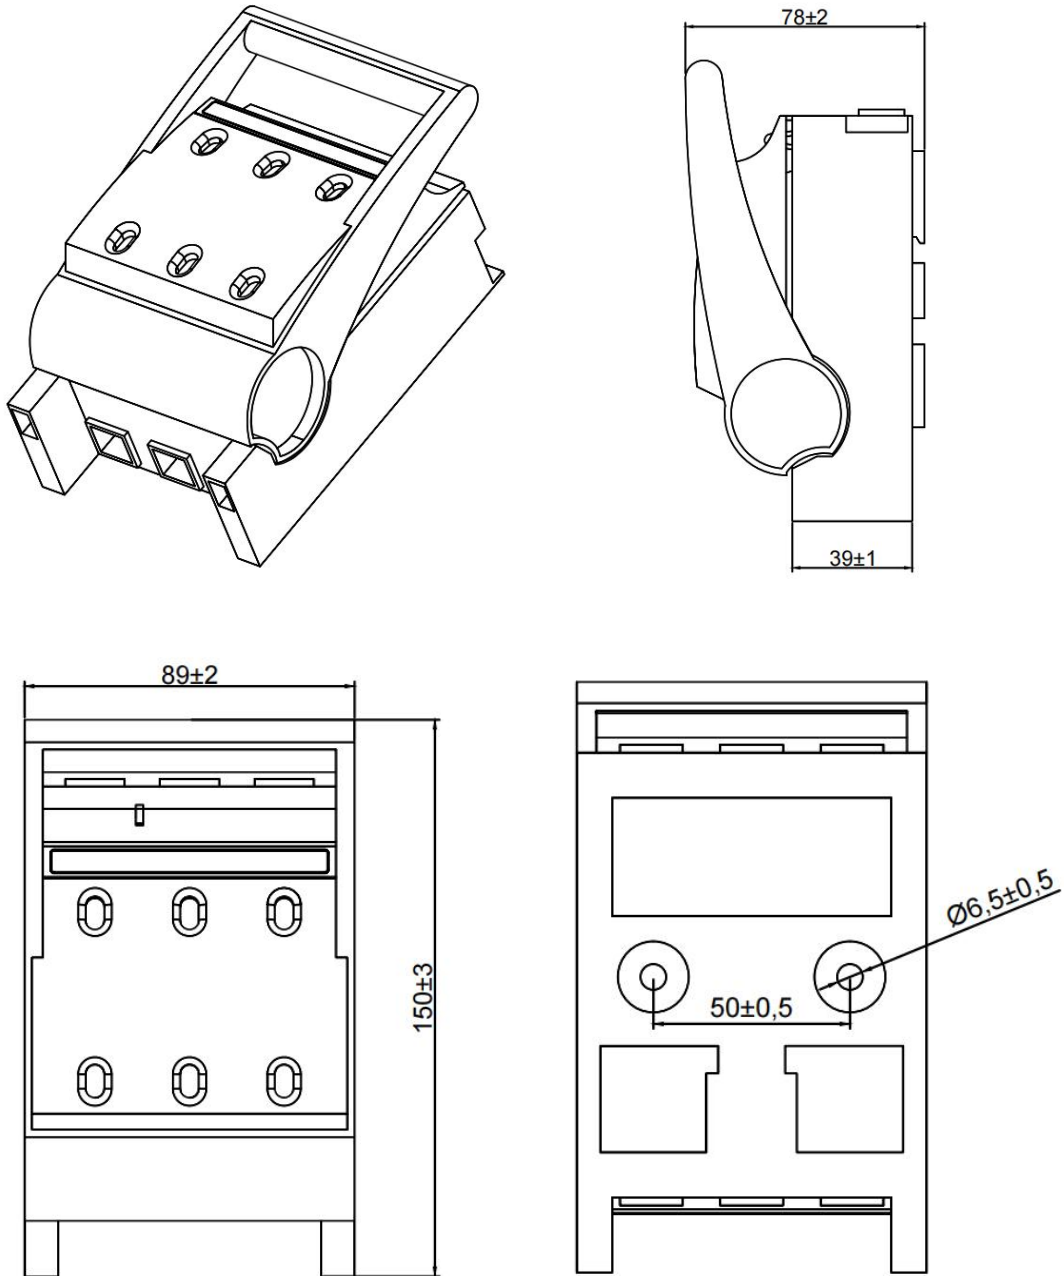

CF-HR18 Fuse Switch Disconnecter Dimension



Zhejiang Chifeng Electric Co., Ltd.

No. 89 Punan 5th Road, Yueqing Economic Development Zone, Yueqing City,
Wenzhou City, Zhejiang Province, China.

www.wzcfdq.com

Model	CF-HR18
Number of poles/phases	3
Fuse Size	NH 000/00C
Conventional free air thermal current with solid links I_{th}	100 A
Rated operational voltage U_e AC	400V/500V/690 V
Utilization category to IEC/EN 60947-3	AC 23 B AC 22 B AC 21 B
Rated insulation voltage U_i	690 V
Rated impulse withstand voltage U_{imp}	6 kV
Rated frequency	50-60 Hz
Degree of protection from the front	IP 20
Standard cable terminal	M8
Installation mode	bottom fitting