

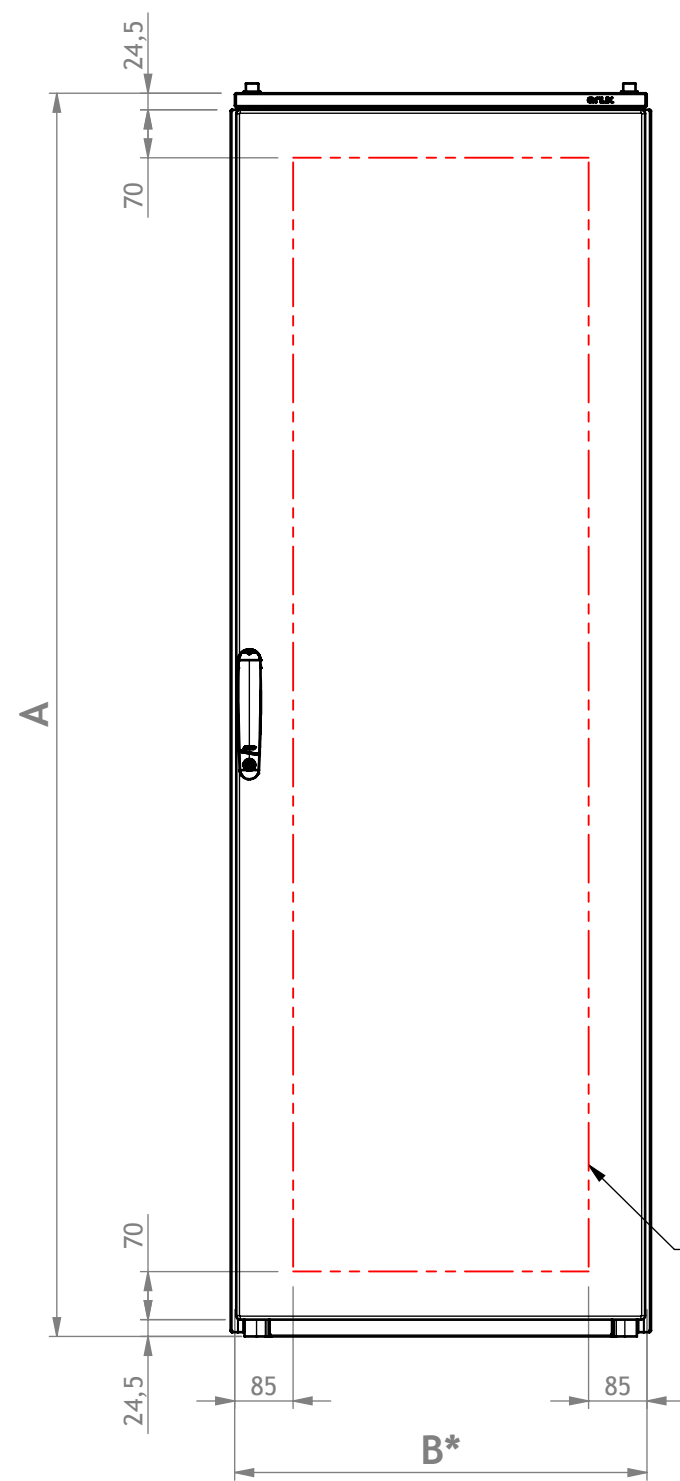


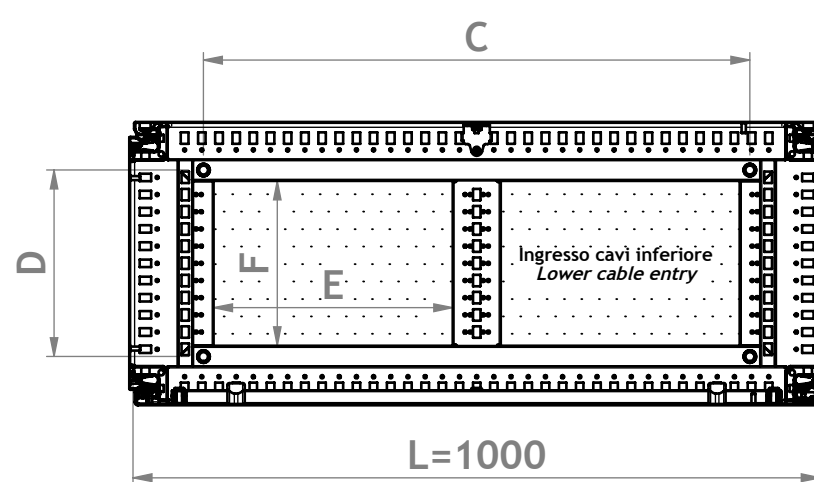

Max area forabile
Available space for machining

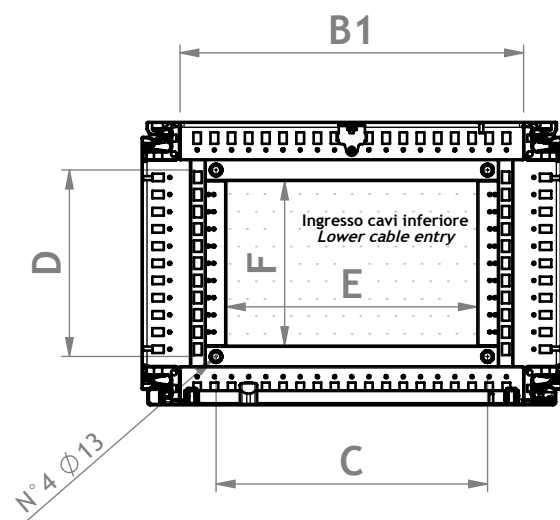

Nr. cod.**	Dimensioni armadio Cabinet dimensions			Fiss. pavimento Floor fixing		Ingr. cavi Cable entry		Spazio int.utile Useful internal space		
	B*	A	P	C	D	E	F	B1	A1	P1
ENUX061804PRX	600	1809	414	395	271	365	240	500	1700	300
ENUX061805PRX	600	1809	514	395	371	365	340	500	1700	400
ENUX062005PRX	600	2009	514	395	371	365	340	500	1900	400
ENUX062006PRX	600	2009	614	395	471	365	440	500	1900	500
ENUX081804PRX	800	1809	414	595	271	565	240	700	1700	300
ENUX081805PRX	800	1809	514	595	371	565	340	700	1700	400
ENUX082005PRX	800	2009	514	595	371	565	340	700	1900	400
ENUX082006PRX	800	2009	614	595	471	565	440	700	1900	500
ENUX101805PRX	1000	1809	514	795	371	347	340	900	1700	400
ENUX101806PRX	1000	1809	614	795	471	347	440	900	1700	500
ENUX102005PRX	1000	2009	514	795	371	347	340	900	1900	400
ENUX102006PRX	1000	2009	614	795	471	347	440	900	1900	500

** Per acciaio inossidabile AISI316L aggiungere suffisso H
To order the item in higher grade AISI316L, add the suffix H

* Con pannelli montati aggiungere 12mm
With side panels mounted add 12mm

e nux
INOX

E NUX inox
PORTA SINGOLA SINGLE DOOR
Assieme - Overall drawing

eta

7.47.01.08.32.08.01

REV
A